


Canon DSLR X 40

Processor Box

- Each device controls 4 DSLR

Camera Hub


- Trigger synchronization
- DC power supply

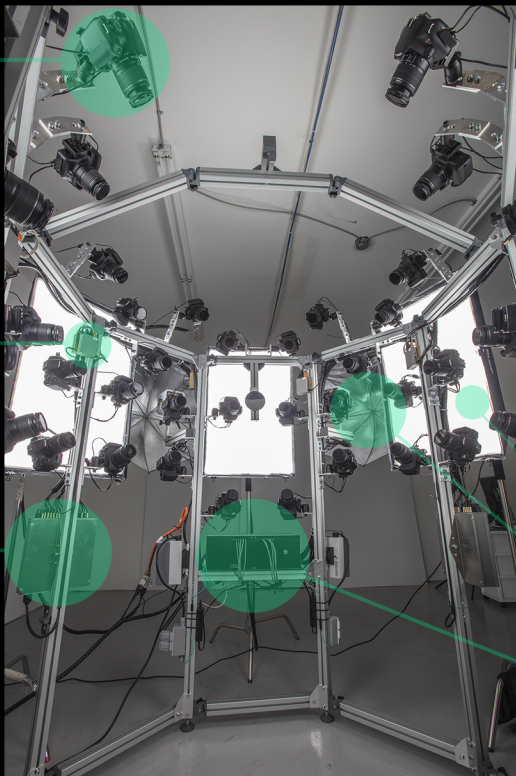

PLE Facial 3D Scanning System

Components and turn-key solution available

- 110 or 220V power
- 4x4m footprint

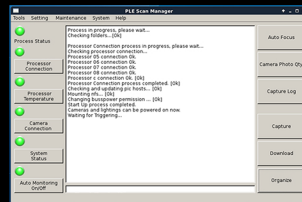

PLE Scan Manager

- Shooting parameters setup
- Download speed up to 300MB/s
- Shot management
- Each shot is grouped into individual folders with consistent camera names
- System connection diagnose

Cross-polarized Lighting Setup

Secondary Non-polarized Flashes
For look-dev references (Optional)

Control Unit

- Device power switch
- Signal synchronization
- Data management



PIXEL LIGHT
EFFECTS

Vancouver | Beijing
info@pixellighteffects.com